

DA7000 SERIES



**Dependable and Efficient  
Jobsite Power**






# The DA7000-Series delivers reliable power in a compact sound attenuated package. Its size makes it ideal for construction, standby or industrial applications.

## STANDARD FEATURES

- **AC Output** – 7kW maximum, 6kW continuous
- **Sound-attenuated package** – Reduces jobsite noise for added safety
- **Control Panel** – Ease of access and durable to withstand the toughest jobs
- **Brushless alternator design** – Reduces maintenance while still providing years of dependable service
- **Full-panel GFCI protection** – Compliant with OSHA and NEC regulations
- **Full power switch** – Provides the operator with balanced output under changing loads
- **Hour meter** – Allows accurate tracking of usage and maintenance intervals
- **Engine** – Dependable Tier 4 Final Kubota Diesel that meets all current EPA requirements
- **Single side maintenance** – Ideal for Ground Heater applications and confined areas



Model: DA7000SSA3  
shown with optional trailer mount

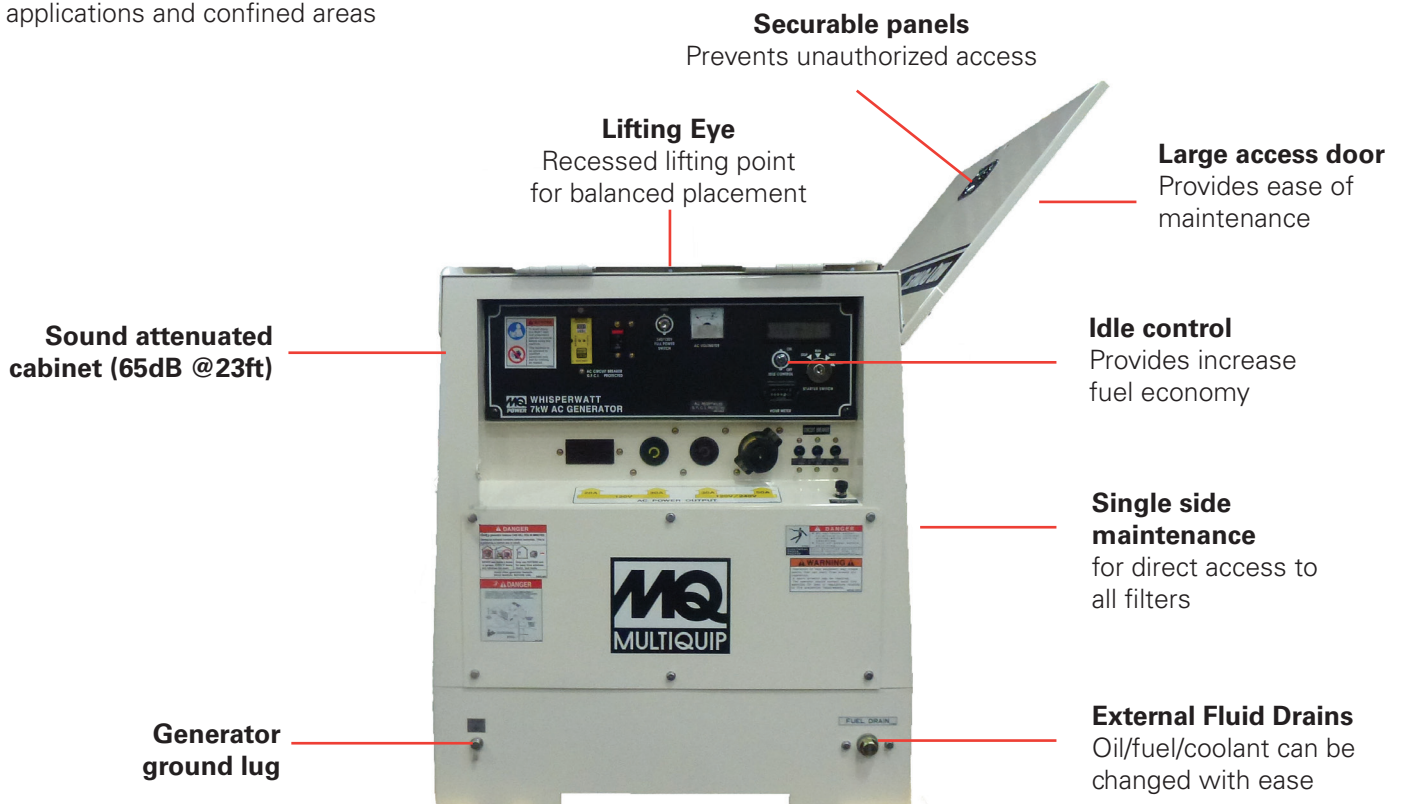

Model: DA7000SSA3  
Powered by 12.5 HP Kubota Z482 Diesel engine



# The practical solution for permanent generator installation.

Single side service access is standard with the DA7000SSA3. Maintenance is simplified to enable all service points (fuel filter, oil filter, battery, coolant, air filter and drains) to be accessed from the same side of the generator. It is recommended for applications where the generator will be permanently mounted on equipment or installed in an area with obstructed access to the cabinet.



**Model: DA7000SSA3**  
Equipped for single side maintenance

## A variety of options and accessories are available to customize the DA7000-Series to fit your application requirements.

- **Electronic Control Unit** – Provides the ability to automatically start/stop with the use of an automatic transfer switch
- **Battery Saver** - Cuts output from the battery anytime loss of battery charge back is not present. Recommended for remote or unattended applications. *NOTE: Battery Saver Accessory can not be used with Electronic Control Unit*
- **Water Heater** – Keeps radiant heat within the coolant system for ease of startup in colder climates
- **Battery Tender** – Provides charge to battery in extended down periods. Requires external 120V input
- **Transport** – Choose either a trailer assembly with optional 28 gallon fuel cell, or a rugged wheel kit for job site mobility

## FULL FEATURED CONTROL PANEL

This securable control panel enables you to efficiently operate your job site

A variety of duplex and twist lock receptacles provides the ability to distribute power to equipment and junction boxes. Individual circuit breakers enable you to control output to individual tools and prevent disruption in critical work areas.



# Specifications

MODEL	DA7000SSA3	
Alternator Design	Brushless	
Maximum Watts	7,000	
Continuous Watts	6,000	
Voltage	120/240V	
Max. Amp @ 120V	58	
Cont. Amp @ 120V	50	
Max. Amp @ 240V	29	
Cont. Amp @ 240V	25	
Frequency/Phase	60 HZ Single Phase	
Voltmeter	Standard	
Full Power Switch	Standard	
RECEPTACLES		
5-20R 125V 20A	1	
L5-30R 125V; T-Lock 30A	1	
L14-30R 120/240V; T-Lock 30A	1	
CS-6369; 120/240V 50A	1	
ENGINE		
Engine Manufacture	Kubota Diesel	
Engine Model	Z482	
Emissions	EPA Tier 4 Final Certified	
Horsepower (KW)	12.5 (9.3)	
Rated Speed - RPM	3,600	
Low Oil Shutdown	Standard	
Starting Systems	Electric	
Fuel Capacity - gal (ltr)	6.6 (25)	
Running Time @ full load - hr./tank	10	
Oil Capacity	.66 gal (2.5 ltr)	
Coolant Capacity	.74 gal (2.8 ltr)	
Fuel Gauge	Standard	
Automatic Idle Control	Standard	
Single Side Filter Access	N/A	Standard
Sound Level dB @ 23 ft.	65	
Battery Specification	38B20R (12V-35Ah)	
DIMENSIONS AND WEIGHTS		
Length - in. (cm)	44.9 in. (114 cm)	
Width - in. (cm)	25.6 in. (65 cm)	
Height - in. (cm)	31.3 in. (79.5 cm)	
Approx. Dry Weight - lbs. (kg)	527 Lbs (239 kg)	
Approx. Wet Weight - lbs. (kg)	534 Lbs (242 kg)	

OPTIONS	PART NUMBER #
Electronic Control Unit	MQPECUDA7KIT
Battery Tender	MQPBCDAKIT
Battery Saver†	MQPBSDAKIT
Industrial Fuel Filter	MQPRACOR10KIT
Emergency Stop	MQPESDAKIT
Block Heater	MQPHEATDAKIT
Fuel Heater	MQPILHEATERKIT
Oil Pan Heater	HEATPADKIT
Filter Kit (Air, Fuel & Oil)	FKITDA7000SSA2

† Can not be used with Electronic Control Unit

TRANSPORT OPTIONS	PART NUMBER #
Wheel Kit	WKT225A
Light Duty Trailer	TRLR10W
Heavy Duty Trailer	TRLRMP
Heavy Duty Trailer with 28 Gallon Fuel Cell	TRLRMPXF
Lockable Tool Box	59180

\* Engine power ratings are calculated by the individual engine manufacturer and the rating method may vary among engine manufacturers. Multiquip Inc. and its subsidiary companies makes no claim, representation or warranty as to the power rating of the engine on this equipment and disclaims any responsibility or liability of any kind whatsoever with respect to the accuracy of the engine power rating. Users are advised to consult the engine manufacturer's owners manual and its website for specific information regarding the engine power rating.

Your Multiquip dealer is:

