



HardLine™ Silencers

Lightweight, efficient, and robust method for achieving sound attenuation. HardLine silencers are bolted to either the inlet or outlet of auxiliary fans. Typically applied to both ends of the fan or on a single end between the fan and sound sensitive location.

FEATURES

- Silencer design includes casing, insulation and steel inner liner
- Bolt patterns can be included on flange or easily drilled on-site
- Sound attenuation materials are moisture resistant and flame retardant
- Silencer sizes up to 55" diameter

HARDLINE ADVANTAGE

- Casing manufactured with proprietary RigiFlex FR polymer that absorbs vibration, optimizing sound attenuation
- HardLine™ Silencers are durable and impact resistant
- Units are less than half the weight of their steel counterparts
- Shorter lengths allow for easy installs while maintaining a high decibel reduction
- Equivalent to podded silencer performance, without the airflow restrictions



ABC VENTILATION SYSTEMS | 1802 QUEBEC AVENUE SASKATOON SK S7K 1W2
PHONE: 306 653 4303 | FAX: 306 653 3890 | EMAIL: SALES@ABCVENTILATION.COM

www.abcventilation.com


ABC Ventilation Systems is a world leader in mine ventilation.





HardLine™ Silencers

DIMENSIONS

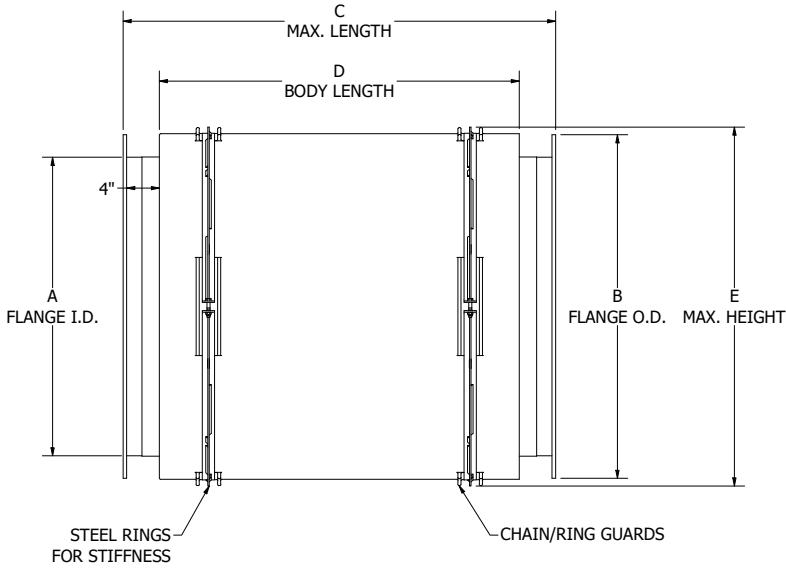

SIZE [in]	A [in]	B [in]	C [in]	D [in]	E [in]	WEIGHT [lb]
30	30	36	52.875	44	37.875	140
36	36	42	52.875	44	43.875	195
40	40	46	64.875	56	49.875	270
48	48	54	76.875	68	55.875	340
54	54	60	76.875	68	61.875	385

SOUND ATTENUATION

- Sound intensity tests have been carried out to determine precise and reliable levels of sound reduction for the HardLine Silencer. The table below lists the dB reductions for each octave band.

OCTAVE BAND	63 Hz	125Hz	250Hz	500Hz	1000 Hz	2000 Hz	4000 Hz	8000 Hz
ATTENUATION VALUE [dB]	-5.2	-8.8	-10.1	-15.6	-17.1	-16.6	-12.7	-17.9

* Based on an average of readings at 1.5m from inlet