




**DURST®**

# PUMP DRIVES

Our modular design can be configured and shipped to meet your application needs. It's built tough to provide outstanding performance, and backed by our responsive engineering and customer service teams to give you the leading pump drive solution.

## FEATURES

- Quick Ship Program Available
- Modified Standards Available
- Patented Modular Design
- Compact Package Size
- Cast Iron Housing
- AGMA Class 10 Spur Gearing
- One Piece Gear and Shaft Design
- Wide Range of Ratios
- Patented Wet Spline Connection;  
Patent No. 7,152,711
- Drop-in Replacement for Most Applications

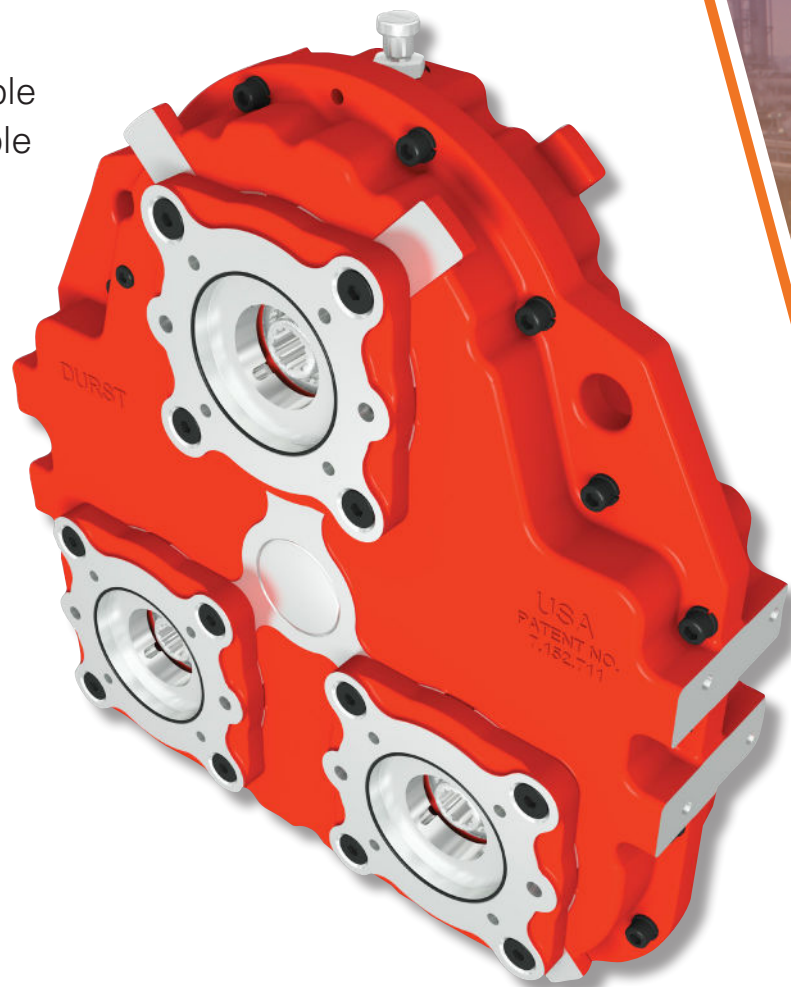

**CALL PJ TO PLACE YOUR ORDER TODAY!**



Palmer Johnson Power Systems

PJPOWER.COM | 800.341.4334 | SALES@PJPOWER.COM



**REGAL®**

## PUMP DRIVES

	MODEL	MAX KW	MAX HP	MAX INPUT TORQUE (N-m)	MAX INPUT TORQUE (FT-LB)	INPUT STYLE	FLYWHEEL HSG. STYLE	RATIO INC. OR DEC.	PUMP ADAPTERS	PUMP CENTER DISTANCE (mm)	PUMP CENTER DISTANCE (in)	
	<b>SINGLE PUMP DRIVE (GEARED)</b>											
	1PD06	369	495	1414	1040	P,C,S	0,1,2,3,4	1:1, 1.06, 1.18, 1.25, 1.32, 1.40, 1.48, 1.57, 1.67, 1.88 INC	A,B,C,D,E,F	152.4	6.0	
	1PD09	608	815	2325	1710	P,C,S	0,1,2,3,4	1:1, 1.12, 1.20, 1.30, 1.40, 1.70, 2.00	A,B,C,D,E,F	228.6	9.0	
	<b>TWO PUMP DRIVE</b>											
	2PD05	276	370	949	700	P,C,S	2,3,4	1:1, 1.14, 1.40, 1.61, 2.00	A,B,C,D	254.0	10.0	
	2PD06	369	495	1414	1040	P,C,S	0,1,2,3,4	1:1, 1.06, 1.18, 1.25, 1.32, 1.40, 1.48, 1.57, 1.67, 1.88	A,B,C,D,E,F	304.8	12.0	
	2PD08	541	725	2074	1525	P,C,S	0,1,2,3,4	1:1, 1.13, 1.23, 1.34, 1.40, 1.53 INC	A,B,C,D,E,F	406.4	16.0	
	2PD10	708	950	2713	1995	P,C,S	0,1,2,3,4	1:1, 1.14, 1.17, 1.21, 1.29, 1.33, 1.38	A,B,C,D,E,F	533.4	21.0	
	<b>THREE PUMP DRIVE</b>											
	3PD06	369	495	1414	1040	P,C,S	0,1,2,3,4	1:1, 1.17, 1.29, 1.36, 1.52, 1.69 INC	A,B,C,D	215.6 x 314.4	8.49 x 12.38	
	3PD08	541	725	2074	1525	P,C,S	0,1,2,3,4	1:1, 1.13, 1.23, 1.34, 1.40, 1.53 INC	A,B,C,D,E,F	337.6 x 304.8	13.29 x 12.0	
	3PD10	708	950	2713	1995	P,C,S	0,1,2,3,4	1:1, 1.14, 1.17, 1.21, 1.29, 1.33, 1.38	A,B,C,D,E,F	404.1 x 457.2	15.9 x 18.0	
	<b>FOUR PUMP DRIVE</b>											
	4PD08	541	725	2074	1525	P,C,S	0,1,2,3,4	1:1, 1.13, 1.23, 1.34, 1.40, 1.53 INC	A,B,C,D,E,F	281.4 x 293.1	11.08 x 11.54	
	4PD09	608	815	2325	1710	P,C,S	0,1,2,3,4	1:1, 1.12, 1.20, 1.30, 1.40, 1.70 INC	A,B,C,D,E,F	309.4 x 336.6	12.18 x 13.25	
	4PD11	764	1025	2924	2150	P,C,S	0, 1,2,3,4	1:1, 1.16, 1.23, 1.31, 1.39, 1.57 INC	A,B,C,D,E,F	407.9 x 406.4	16.06 x 16.0	
	<b>INLINE THREE AND FOUR PUMP DRIVES</b>											
	3PD10L	708	950	2713	1995	P,C,S	0,1,2,3,4	1:1, 1.14, 1.21, 1.29, 1.33, 1.38	A,B,C,D,E,F	533.4	21.0	
	4PD10L	708	950	2713	1995	S	N/A	1:1, 1.14, 1.21, 1.29, 1.33, 1.38	A,B,C,D,E,F	533.4	21.0	
	<b>FIVE PUMP DRIVE</b>											
	5PD11	764	1025	2924	2150	P,C,S	0,1,2,3,4	1:1, 1.16, 1.23, 1.31, 1.39, 1.57 INC	A,B,C,D,E,F	407.9 x 406.4	16.06 x 16.0	
	<b>EIGHT PUMP DRIVE</b>											
	8PD09	608	815	2325	1710	S	N/A	1:1, 1.12, 1.20, 1.30, 1.40, 1.70 INC	A,B,C,D,E,F	309.4 x 336.6	12.18 x 13.25	
	8PD11	764	1025	2924	2150	S	N/A	1:1, 1.16, 1.23, 1.31, 1.39, 1.57 INC	A,B,C,D,E,F	407.9 x 406.4	16.06 x 16.0	

## DURST®

Regal Beloit America, Inc.

7120 New Buffington Road

Florence, KY 41042

Customer Service: 1-800-356-0775

Fax: 608-365-6812

Technical Service: 608-365-2563

email: [durstinfo@regalbeloit.com](mailto:durstinfo@regalbeloit.com)

[www.regalbeloit.com](http://www.regalbeloit.com)

### APPLICATION CONSIDERATIONS

The proper selection and application of products and components, including the related area of product safety, is the responsibility of the customer. Operating and performance requirements and potential associated issues will vary appreciably depending upon the use and application of such products and components. The scope of the technical and application information included in this publication is necessarily limited. Unusual operating environments and conditions, lubrication requirements, loading supports, and other factors can materially affect the application and operating results of the products and components and the customer should carefully review its requirements. Any technical advice or review furnished by Regal Beloit America, Inc. and/or its affiliates ("Regal") with respect to the use of products and components is given in good faith and without charge, and Regal assumes no obligation or liability for the advice given, or results obtained, all such advice and review being given and accepted at customer's risk.

For a copy of our Standard Terms and Conditions of Sale, please visit <https://www.regalbeloit.com/Terms-and-Conditions-of-Sale>. These terms and conditions of sale, disclaimers and limitations of liability apply to any person who may buy, acquire or use a Regal product referred to herein, including any person who buys from a licensed distributor of these branded products.

Regal, Creating a better tomorrow and Durst are trademarks of Regal Beloit Corporation or one of its affiliated companies.

©2019 Regal Beloit Corporation, All Rights Reserved. MCSSP19021E • Form# 10285E

**CALL PJ TO PLACE YOUR ORDER TODAY!**



Palmer Johnson Power Systems

[PJPOWER.COM](http://PJPOWER.COM)

**800.341.4334**

[SALES@PJPOWER.COM](mailto:SALES@PJPOWER.COM)

**REGAL®**